




OVERVIEW

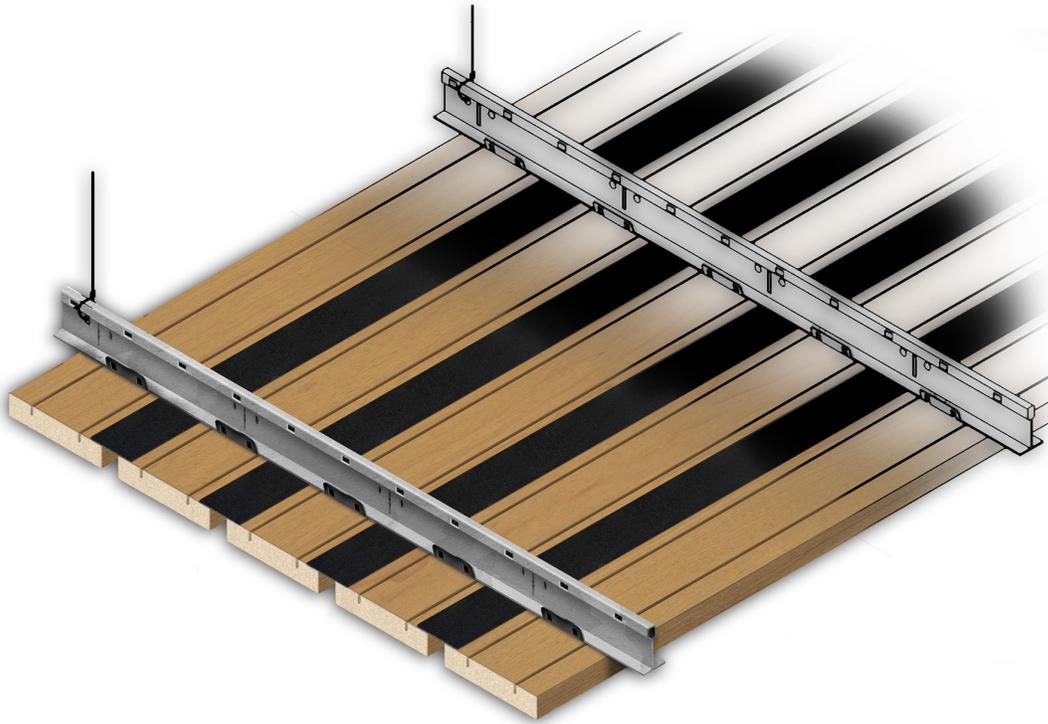

SYSTEM

Rulon Veneered Linear wood ceilings are designed with wood boards suspended parallel to the floor and reveals separating each wood board. Veneered Linear utilizes the [Cliprail[®]](#) system eliminating heavy metal framing and support typically required to suspend nailed-in-place boards. Wood boards are installed continuously with tongue & groove ends to create a continuous, monolithic appearance. Standard lengths are 8' (96"). Veneered Linear is available only in veneer.



TECHICAL DATA



ENGINEERING CONSIDERATIONS

Veneered Linear is manufactured at Rulon's plant in St. Augustine, FL. The [Linear Clip^H](#) is a proprietary attachment method utilized by Rulon, and is simple for installers. All shop drawings and coordination details are produced by Rulon's engineering staff.



ACCESSIBILITY

Clips are factory-attached to heavy-duty grid and are mechanically fastened to wood boards by contractor. Please note, removing wood boards would damage them. [Primary Access Panels^I](#) can be coordinated with MEP locations and cut in-field. Limited access is available.



ACOUSTICS

Standard Veneered Linear is manufactured with fiber felt spacers between wood boards allowing sound to pass through the reveals to the plenum space beyond. Veneered Linear has been tested in accordance with ASTM C-423 and achieves an **NRC-0.55**.



SUSTAINABILITY

Veneered Linear may contribute as required to the following LEED v4 credits: **MR BPD&O - Sourcing of Raw Materials, MR BPD&O - Material Ingredients, EQ Low-Emitting Materials, EQ Minimum Acoustic Performance.**



FIRE PERFORMANCE

Veneered Linear can be treated to meet **Class A** requirements as per ASTM E-84. Veneers are applied to an FR core (MDF or Particleboard).



SEISMIC

Veneered Linear meets seismic code compliance via direct screw attachment to heavy duty grid. Local code requirements should be consulted in order to determine additional requirements.



INTEGRATIONS

Veneered Linear can be easily trimmed in-field to accommodate MEP integrations. Touch-up finish and edgbanding is supplied to veneer and seal cut edges. In-factory cutouts can be achieved with dedicated coordination and in conjunction with the [Integrated Lighting^P](#) program at Rulon.



GENERAL COSTING

Veneered Linear is typically a moderately-priced system depending on the material and manufacturing requirements. Veneered Linear qualifies as **\$\$\$\$** on the general costing scale. Local reps should be contacted in order to obtain a project-specific budget.



SPECIFICATION

COMPONENTS

HANGERS

#12- gauge wire hangers, braided wire, or aircraft cable (contractor-supplied).

SUSPENSION SYSTEM

Rulon cliprails are made from galvanized steel and are 12 feet long. They are factory-fabricated with [Linear Clips^H](#) assembled onto standard heavy-duty 15/16" grid. The clips are made of spring-steel, with phosphate pretreatment and a corrosion-resistant coating. The assembled cliprails are provided by Rulon as part of the system.

ATTACHMENT

Veneered Linear boards install end-to-end using a tongue & groove joint followed by compression into a friction-fit clip. A clamping tool is to be used for rapid and easy assembly of wood boards to the cliprails (see drawing LOCXF002).

PROFILES

Wood boards are 3/4" [19 mm] thick, with widths determined by the module selected. Standard board widths/modules are as follows:

- 3-3/4" [95 mm] board with 1/4" [6mm] reveal for 4" [102 mm] module
- 3-3/4" [95 mm] board with 3/4" [19mm] reveal for 4-1/2" [114 mm] module
- 5-1/4" [133 mm] board with 3/4" [19mm] reveal for 6" [152 mm] module

SPACERS

Fiber felt is factory-applied to one edge of each wood board, offering a closed plenum for more efficient air movement and dust containment. The fiber felt spacer provides a fire retardant closure and is black. Black ABS spacers, 1/8" thick, may be substituted for the fiber felt as required (see drawing LOCXH01). The ABS profile is commonly referred to as a Veneered Linear with a hardboard spacer.

CONDITIONS

Ceiling termination at a wall or soffit is accomplished using various trims (for example, see drawing D-120).

WOOD SELECTIONS

WOOD SPECIES

Rulon Veneered Linear may be specified in a variety of wood species. Standard veneer wood species are: Ash, Maple, Walnut, Red Oak, White Oak, Anegre, Beech, Bamboo, and Cherry. Premium veneers and non-wood laminates are available.



LINEAR DATA SHEET

System: Linear | Style: Veneered



SPECIFICATION

TEXTURES

Standard surface texture is smooth-sawn. Faces are sanded.

FINISHES

WOOD FINISHES

Standard finish is 20 sheen clear. Custom stains, opaque or semi-transparent colors are also available. All finishes are water based, low VOC-emitting, and do not contain solvents.

SHIPPING & STORAGE

SHIPPING

Wood boards are shipped in 8-piece bundles, in shrink wrap packaging. Finished surfaces face one another to prevent marring.

STORAGE

Veneered Linear shall be stored flat and level, in a fully enclosed space away from sunlight or moisture. For a minimum of seventy-two (72) hours immediately prior to ceiling installation, the packaging shall be opened and the panels shall be stored in the room in which they will be installed. The temperature and humidity of the room shall closely approximate those conditions that will exist when the building is occupied. Panels must be stored off the floor.

COORDINATION

TEMPERATURE & HUMIDITY

System shall be installed only when the temperature and humidity closely approximate the interior conditions that will exist when the building is occupied. Heating and cooling systems shall be operating before, during, and after installation, with the humidity of the interior spaces maintained between 25 and 55 percent, and a temperature between 60 to 90 degrees F.



TYPICAL DETAILS

THIS IS A PLACEHOLDER IMAGE



LINEAR DATA SHEET

System: Linear | Style: Veneered



NOTES

- Ⓓ The Integrated Lighting program at Rulon is in partnership with GE Lighting and is an effort to coordinate MEPs more effectively and provide for a more streamlined process of integration. In practice, this effort begins with factory cutouts to accommodate light fixtures.
- Ⓗ The Linear Clip is a mechanical fastener that utilizes barbed inserts pressed into grooves in the backs of the wood boards creating positive attachment. The clips are made of spring-steel with phosphate pre-treatment and corrosion-resistant coating.
- Ⓘ Primary Access Panels are sections of a system that have been removed and assembled into a lift & shift panel for required-access locations.